



DESIGNED FOR EDUCATION | **MX711** Future Proof • Excellent Image Quality • Affordable

Features

- Native XGA (1024 x 768) Resolution
- 3200 ANSI Lumens, 5300:1 Contrast Ratio
- LAN Control/Display, USB Reader/Display
- Built-In 10W Speaker, Microphone-In
- 3D-Ready, Wireless Display (Optional)

Top / Front




Top



Front

Input and Output Terminals

Back

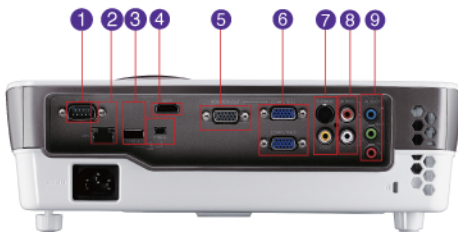

- 1 RS-232 x1
- 2 RJ45 x1 (Control/Display)
- 3 USB Type A & Mini B
- 4 HDMI x1
- 5 RGB Output x1
- 6 RGB In/Component x2
- 7 S-Video / Video
- 8 Audio R/L x1
- 9 Audio In & Out / Mic-In

PLink™ SNMP



Specifications

EDUCATION

Native Resolution	XGA (1024 x 768)
Brightness	3200 ANSI Lumens
Contrast Ratio	5300:1 (Full on/Full off)
Keystone	Auto Keystone & Manual Vertical +/- 40 Degree
Aspect Ratio	Native 4:3 (5 selectable aspect ratio)
Color	Full 16.7 Million colors palette
Lens	F = 2.59 ~ 2.87
Zoom Ratio	Manual Zoom, 1.3:1
Image Size (Diagonal)	32" - 300"
Throw Ratio	1.5 to 1.97 (65"@ 6.5 feet)
Lamp Life	230W, 3500/5000 hours (Normal/Economical Mode)
PC Compatibility	VGA (640 x 480) to UXGA (1600 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-92 kHz
Vertical Scan Rate	48-120 Hz
Input Terminals PC/AV	Analog RGB/Component: D-Sub 15 Pin x2 LAN Networking: RJ45 x1 (LAN Display) USB Type A x1 (Reader) USB Type Mini B x1 (Display) HDMI (v1.3) x1 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Audio L/R: RCA x2 Microphone in: Mini Jack x1, Stereo Mini-Jack x1
Output Terminals PC/AV	Analog RGB: D-Sub 15 Pin x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W x1
Control Terminals	Serial Connector: RS-232 9 Pin (Male) RJ45 x1 (LAN Control) USB Connector: Type Mini-B (Page up/down)
Dimensions (W x H x D)	12.24" x 4.09" x 9.6"
Weight	5.94 lbs (2.7 kg)
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	362W (Max), Standby <1W
Noise Level	32/27 dBA (Normal/Economical Model)
Display Languages	Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese
Picture Mode	Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode
Functions	3D-Ready/LAN Control & Reader/USB Control & Display/Built- In 10W Speaker/Microphone-In/Digital Zoom x2/Closed Captioning/Panel Key Lock/Window 7 Compatible/Wireless Display (Optional)
Accessories (Standard)	Quick Start Guide/User Manual (CD)/Remote Control/Power Cord/VGA Cable/Soft Carrying Case
Accessories (Optional)	Presentation Plus/Spare Lamp Kit/Universal Ceiling Mount
Lamp P/N	5J.J3V05.001
Limited Warranty	3-Years Parts & Labor / 1-Year or 2000 hours of lamp life

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

MX711-EDU011911-US

BenQ America Corp.

15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 • Tel: (949) 255-9500 • www.BenQ.us