

BL WX25NU / BL X25NU


Specifications




Model	BL WX25NU / BL X25NU
Technology	BL WX25NU: .59" 3LCD BL X25NU: .63" 3LCD
Brightness	2500 Lumens (standard) / 1750 (economy)
Native Resolution	BL WX25NU: 1280 x 800 (WXGA) BL X25NU: 1024 x 768 (XGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Colors	16.7 million
Brightness Uniformity	80%
Projection Methods	Desktop front/rear; Ceiling front/rear
Projection Distance	2' to 4.4' / 0.61m to 1.34m
Contrast Ratio	600:1
Aspect Ratio	BL WX25NU: Native 16:10; Compatible 16:9 & 4:3 BL X25NU: Native 4:3; Compatible 16:9 & 16:10
Image Size	49" to 100" / 124.5cm to 264cm
Keystone Correction	Vertical +/- 30°, Auto
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120 Hz
Audio Output	1 x 8W mono
Lamp	210W UHP
Lamp Life	3000/5000 (standard/economy)
Optical Offset	163% / 120%
Remote Control	Full function IR remote with laser pointer
Noise Level	36dB (standard) / 33dB (economy)
Power Supply	Universal AC Input 100–240V at 50-60 Hz
Power Consumption	<310W <1W in Standby mode
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible. USB 1.0 or greater required
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA x 1, VGA in/out x 1, HDMI, Composite video with 2 RCA (R/L) audio-in, Component video, S-Video, Audio 3.5mm in x 2, LAN, RS232, USB port for interactive function, VGA in/out and 3.5mm outputs
Service and Network Control	RS232, RJ45, USB for mouse control
Weight	9 lbs / 4.08kg
Dimensions (W x H x D)	14.2" x 5.2" x 13.7" / 36.1cm x 13.2cm x 34.8cm
Operating Temperature	41° ~ 95° F, Humidity 20% to 80%, non-condensing
Safety Certifications	FCC-B, UL, CB, CE, CCC, ROHS, REACH
Safety	Kensington Lock Port, Keypad lock, Anchor security bar
Standard Accessories	AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual (cd), carry case for wand and pen
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, WallMount-U, WallMount-U60

Key Features

- Ultra short throw 0.63:1
- Plug and play
- Retrofitable
- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White board, Black board and User)
- Side changing lamp and filter
- Advanced anti-theft features, Kensington lock, keypad lock and security anchor bar
- Built-in 8W speaker
- Built in Network Control software via RJ45 (LAN) connection
- Multi language OSD (On-Screen Display)
- Closed caption
- Logo capture
- Image freeze function

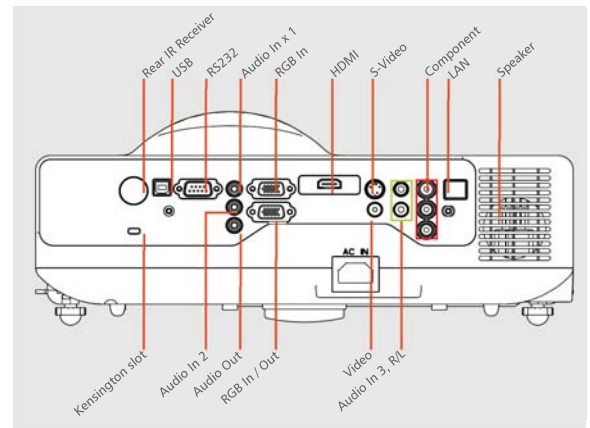

Throw Distance (ft)

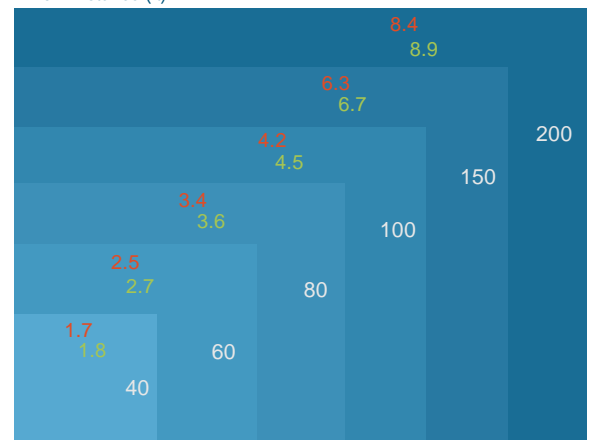

■ BL X25NU ■ BL WX25NU Diagonal Image Size (inches)

Note: allow 3-5% variance on all projector throw ratios



Outstanding Technical Support 24/7/365

And, of course, all **BOXLIGHT** products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

©2011 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance.
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528



360.464.2119
www.BOXLIGHT.com